


Broca para bisagras de mango cilíndrico

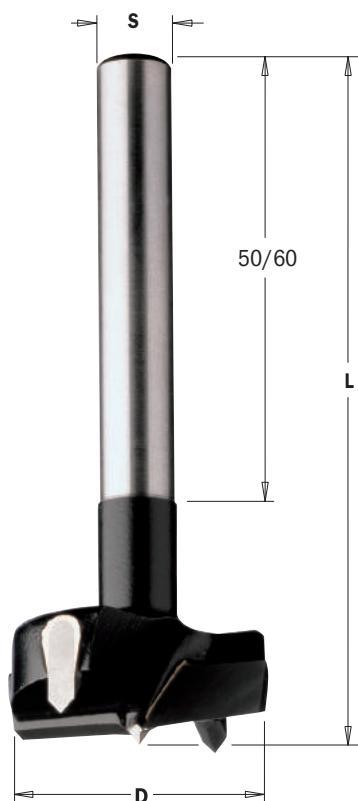

512

D mm	L mm	S mm	CÓDIGO	Rotación derecha
14	90	10x60	512.140.11	
15	90	10x60	512.150.11	
16	90	10x60	512.160.11	
17	90	10x60	512.170.11	
18	90	10x60	512.180.11	
19	90	10x60	512.190.11	
20	90	10x60	512.200.11	
21	90	10x60	512.210.11	
22	90	10x60	512.220.11	
23	90	10x60	512.230.11	
24	90	10x60	512.240.11	
25	90	10x60	512.250.11	
26	90	10x60	512.260.11	
27	90	10x60	512.270.11	
28	90	10x60	512.280.11	
29	90	10x60	512.290.11	
30	90	10x60	512.300.11	
31	90	10x60	512.310.11	
32	90	10x60	512.320.11	
33	90	10x60	512.330.11	
34	90	10x60	512.340.11	
35	90	10x60	512.350.11	
38	90	10x60	512.380.11	
40	90	10x60	512.400.11	
new 42	90	10x60	512.420.11	
45	90	10x50	512.450.11	
48	90	10x50	512.480.11	
50	90	10x50	512.500.11	
55	90	10x50	512.550.11	
58	90	10x50	512.580.11	
60	90	10x50	512.600.11	

CARACTERÍSTICAS TÉCNICAS:

- Fabricado en acero especial de alta resistencia
- Punta de centrado HW
- 2 cortes HW [Z2]
- 2 precortadores con afilado negativo HW [V2]

EMPLEO: para taladros ciegos en madera maciza, sus derivados, también laminados.

Ideal para bisagras.